

SOLISTA LX Wall

LED Beacon

VANDERBILT



The Solista LX Wall product takes its slim line design cues from the popular Solista Maxi. Available in a red or white body colour and with a shallow or deep base, the Solista LX Wall is suitable for a variety of application. The Solista LX Wall has a unique lens design that distributes light to achieve the required illumination, whilst using minimum current.

- Ultra-low current consumption
- Up to 7.5m room coverage
- 0.5Hz or 1Hz Flash rate
- Coverage switch to 2.5m


SOLISTA LX Wall

LED Beacon

VANDERBILT

Benefits

- Use where current consumption is a key consideration
- Ideal for bedrooms, bathrooms and toilets
- Switch flash rate to 0.5Hz to reduce current consumption
- Reduces power consumption by up to 50%

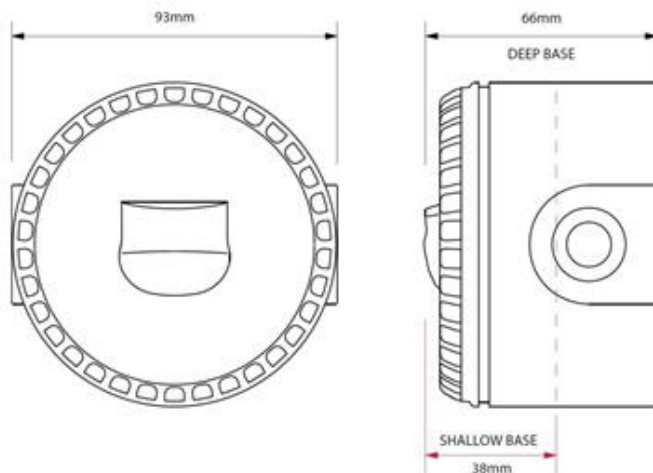

■ Technical Specifications	
Mounting Type	Wall
Voltage	9 – 60VDC
Current	10 – 25mA dependent on setting
Coverage (y)	7.5m (Switchable to 2.5m)
Mounting Height (x)	2.4m (max)
Coverage Volume Code	W-2-4-7.5
Coverage Volume	132m ³ (15m ³)
Flash Rate	1Hz (Switchable to 0.5Hz)
Operating Temperature	-25°C...+70°C
Monitoring	Reserve Polarity
Protection	IP33C Shallow Base and IP65 Deep Base
Weight	100g

■ Ordering Information			
Type	Art-No.	Description	Weight
SOLITA-LX-W-R	N54539-Z285-A100	Beacon, Wall, red	100g
SOLITA-LX-W-W	N54539-Z285-A200	Beacon, wall, white	100g

■ Accessories			
Type	Art-No.	Description	Weight
SOCKELVIT	N54539-Z153-A100	Deep base white, IP65	60g
SOCKEL RÖD	NSE2:SOCKEL-ROD	Deep base red, IP65	60g

Issued by
Vanderbilt
Clonsbaugh Business and
Technology Park
Clonsbaugh
Dublin 17
Ireland
www.vanderbiltindustries.com

Data and design subject to change without notice.
Supply subject to availability.

VANDERBILT

© Vanderbilt 2016